

PORODO



Porodo

Voyage Universal Travel Adapter

SKU: PDFWCH108BK

Table of Contents

Product Overview	2
Specifications	2
Safety Precautions	3
Schematic View	4
Usage Instructions	4
Adapter Compatibility	5
Fuse Replacement Guide	7
Compatible Sockets	8
Accepted Plug Types	8
Compatible Countries & Regions	9
Disposal	9
Warranty	10
Contact Us	10

Product Overview

The Porodo Voyage Universal Travel Adapter is a compact charging solution designed for travelers. It features a 70cm retractable USB-C cable with a magnetic attachment for easy storage. The adapter is compatible with laptops and other devices, offering PD 70W and QC 18W fast charging. It includes four plug types (US, UK, AUS, and EU), making it ideal for international use. This travel adapter ensures efficient and convenient charging on the go.

Specifications

Material	PC
Rated Power	1000W at 100V, 2500W at 250V
Rated Voltage	100-240V
Rated Frequency	50/60Hz
Rated Current	1.8A
USB-C1 Output	5V/3A, 9V/3A,12V/3A,15V/3A, 20V/3.5A, PD 70W Max
USB-C2/C3 Output	5V/3A, 9V/2.2A,12V/1.67A, PD 20W Max
USB-A Output	5V/3A, 9V/2A,12V/1.5A, QC 18W Max
Cable Included	70cm 70W USB-C
Plug Types	US, UK, AU, EU
Fuse Rating	10A Max

Sharing Output	USB-C1+USB-C2/USB-C45 :3W+20W, USB-C1+USB-A: 45W+18W, USB-C2+USB-C3 + USB-A: 15W, USB-C1+ (USB-C2+USB-C3+USB-A): 45W+15W
Total Output	70W
Product Weight	212g
Product Size	54× 56 × 72mm
Model Number	PDFWCH108


Safety Precautions

Your brand and its related parties—including manufacturers, dealers, distributors, and influencers—assume no liability for any damage, loss, or injury resulting from the use of this adapter in violation of the following



Warnings:


- 1. Voltage Compatibility:** This adapter (AC-AC) does not convert voltage. The voltage of the appliance you are connecting must match the local power network voltage.
- 2. Unplug When Not in Use:** Always unplug the adapter when it is not in use.
- 3. Grounded Appliances:** Do not use the adapter with appliances that require a ground (earth) wire.
- 4. Damaged Adapter:** Do not use the adapter if it is damaged.
- 5. Avoid Liquids:** Keep the adapter away from liquid, moisture, or humidity.
- 6. High-Power Devices:** Do not use the adapter with electronic devices that require more than 1000W at 100V or 2500W at 250V.
- 7. Wet Hands:** Do not handle the adapter with wet hands.
- 8. Children Safety:** Keep the adapter out of the reach of children.
- 9. Indoor Use Only:** This adapter is designed for indoor use only.

Schematic View

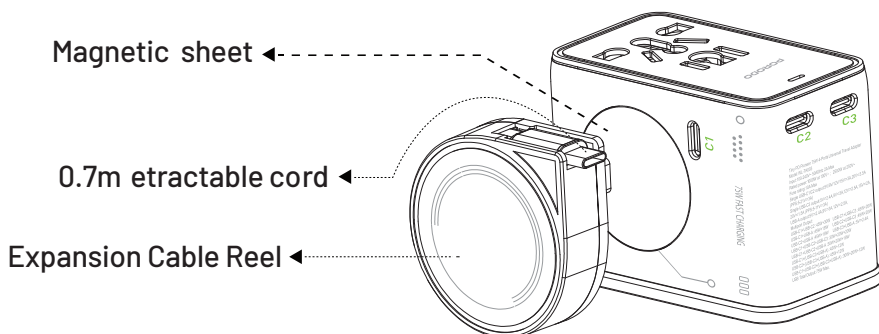


Usage Instructions

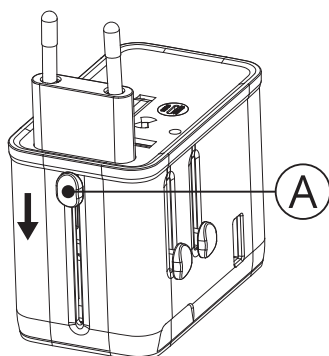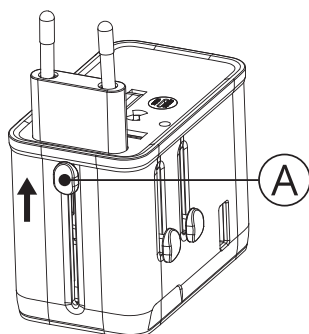




US Plug: For use in Canada, Colombia, Japan, Mexico, the USA, and others.




AUS Plug: For use in Argentina, Australia, China, New Zealand, and others.

Note: This plug shares blades with the US plug. For some uses, you may need to manually rotate the blades to form the slanted “\ /” shape.



UK Plug: For use in Ireland, Malaysia, Singapore, the UK, the UAE, and others.

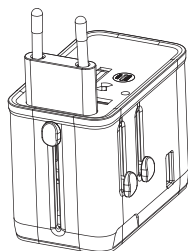

EU Plug: For use in all continental EU countries and many countries in Asia, Africa, and South America.

Adapter Compatibility

The adapter is designed to charge or power the following devices:

- a.** USB-powered devices, including smartphones, smartwatches, battery packs, and similar devices.
- b.** Low-power devices that support dual (worldwide) voltage (Rated input: 100-240V~, 50/60Hz), such as phone or tablet chargers, most laptops, and similar devices.

Note: Some brands may specify voltage ranges such as "110-230V~," "110/250V~," "125-245V~," or similar variations.



Laptop



Tablet



Smartphone



Smartwatch



Power bank



Headset



Handheld
game
console



Camera

Voltage Compatibility Warning

- a.** In the US and Canada, standard AC outlets supply 110–120V~.
- b.** In Europe and many other countries, outlets supply 220–240V~.

Please Note: This adapter does not convert voltage. Using single-voltage devices with an incompatible voltage through this adapter is strictly prohibited, as it may damage your device and result in serious consequences such as overheating, smoke, fire, or even explosion.

Typically, such devices are marked with "120V~, 60Hz" and/or "household use only." Some brands might use "117V~," "110–130V~," or a variation of a similar voltage range.

Must Check: Hair tools, CPAP machines, Electric shavers, Electric toothbrushes, Other similar devices

Not Allowed: Dyson products, Any appliance (hair dryer, steamer, etc.) over 2000W, even if labeled as "dual voltage."



Any hair dryer
over 2000W



Curling iron



Hair
straightener



Electric
shaver



Electric
toothbrush



Water
flosser




Garment
steamer

Need Check

Fuse Replacement Guide

"FUSE" Compartment: In-use fuse

"SPARE FUSE" Compartment: Spare fuse

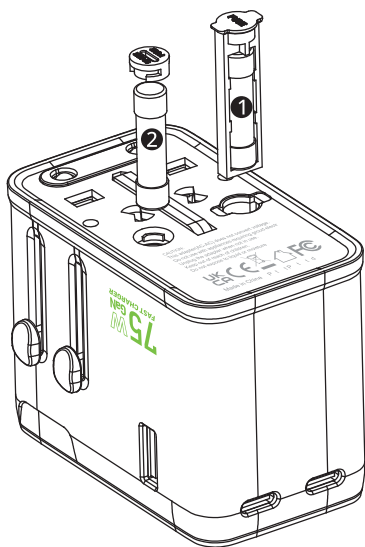

Steps to Replace the Fuse:

1. Remove the fuse holders from the "fuse" and "spare fuse" compartments.
2. Replace the in-use (now blown) fuse 1 compartment with the spare fuse 2.
3. Reinstall the fuse holders back into their respective compartments.

Note: A blown fuse is the most common reason your adapter stops working, especially when using high-power appliances such as a hair dryer. The fuse has a breaking capacity of 10A.

Compatible Sockets

Please refer to the chart below if you reside in the US and plan to travel to other countries with your US 2-prong or 3-prong device. It is essential to ensure that the input voltage of the appliance you intend to connect matches the local power network voltage.

This adapter is compatible with Type A, B, C, E, F, G, H, I, J, K, L, N, and O sockets.

 ✓ Type A	 ✓ Type B	 ✓ Type C	 ✗ Type D	 ✓ Type E
 ✓ Type F	 ✓ Type G	 ✓ Type H	 ✓ Type I	 ✓ Type J
 ✓ Type K	 ✓ Type L	 ✗ Type M	 ✓ Type N	 ✓ Type O


Important Note:

This adapter is not compatible with Type D socket in India and Nepal or Type M socket in South Africa, Swaziland, and Lesotho.

If you are traveling to these countries with this adapter, make sure the place where you stay uses the newer Type C or Type N sockets. If you are unsure, you will need to bring specific Type D or Type M adapters.

Accepted Plug Types

 ✓ Type A	 ✓ Type B	 ✓ Type C	 ✓ Type D	 ✓ Type E
--	---	---	---	--




✓ Type F



✓ Type G



✓ Type H



✓ Type I



✓ Type J



✓ Type K



✓ Type L



✗ Type M



✓ Type N



✓ Type O

Compatible Countries & Regions

Most countries in Europe, North America, and Australia follow well-defined plug, socket, and voltage standards. However, many South American, Asian, and African countries use mixed standards, some of which may be incompatible due to historical reasons. In some countries, the voltage may even vary by region.

This makes it challenging for travelers to determine the type of adapter (or voltage transformer) needed for their trip. We have compiled this list to the best of our knowledge to provide a general overview of the types of plugs and sockets used in over 200 countries and regions. However, given the number of regions in the world and the constantly changing regulations, no single list can cover all regions or be absolutely accurate. We cannot guarantee that the information provided here is error-free or up-to-date. You should not rely solely on this list; it is your responsibility to conduct further research to ensure you have the correct adapter for your trip.

As a rule of thumb for US or Canadian travelers: If Type D or M is not listed for your destination, our adapter will work, provided your device uses the same voltage or supports dual voltage. If Type D or M is listed, more research is needed.

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **<https://www.porodo.net/warranty>** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:
<https://www.porodo.net/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

info@porodo.net

Website: **<https://www.porodo.net/>**

Service Support: **support@porodo.net**

Instagram: **porodo**