



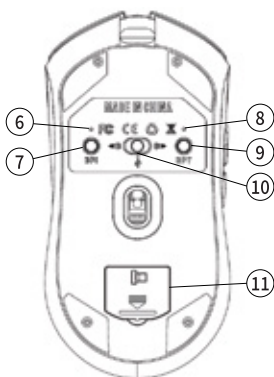

LIGHTFEATHER 7D GAMING MOUSE

USB WIRE / 2.4G / BLUETOOTH

PDX319

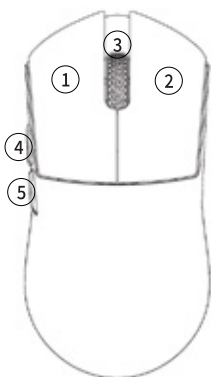

1.Left button

2.Right click

3.Middle key

4.Forward key

5.Backspace

6.DPI indicator

7.DPI key

8.Rate of return indicator

9.Return key

10.Three section mode switch

Left dial Bluetooth

Intermediate off

Right dial 2.4g

11.Built in NANO receiver

System Requirements:

Wired and 2.4G modes: WinXP/Win7/Win8/Win10/Win11/Macos

Bluetooth mode: Win8/Win10/Win11/Macos

Electrical parameters

Highest resolution: 26000DPI (drive can be set)

SPI sampling time: change synchronously with the return rate: 8ms/2ms (default)/1ms

Wired/2.4G rate of return: bottom button is adjustable: red light 125HZ, blue light 500HZ (default), green light 1000HZa

Bluetooth return rate: 125HZ is not adjustable by default

FPS image processing: 26000fps

Maximum speed: 650ips

Working voltage: USB wired: DC5V $\pm$ 5% wireless: DC3.7V

Working current: USB wired:<50MA Wireless: light is always on<15MA, no light<6MA

Bottom sensor light: infrared light

Wire length: total wire length: 2M $\pm$ 1%

Computer connection mode

Wireless mode is plug and play. When wired and wireless are used at the same time wired mode is preferred

Sleep Wake Up

After 5 seconds of release and stop, it will enter the first level sleep mode; After 60 seconds of release and stop, it will enter the secondary sleep mode. In sleep mode, click or move to wake the mouse.

Charge indicator

When the data line is connected, the roller position indicator is always on in red, indicating that it is charged and turned off after being fully charged. (Charging time is about 3-5 hours)

Note: This product supports up to DC5V charging voltage and 300MA charging current. We are not responsible for problems caused by improper charging

Low power indication

When the wheel position indicator flashes in yellow, it indicates low power, and charging is required to ensure the normal use of the mouse

(Slight deviation according to actual use)

2.4G and Bluetooth profile indicator

When the bottom three section switch is turned to the G icon, the green light at the wheel position will stay on for three seconds and go out. When the bottom three section switch is turned to the B icon, the blue light at the wheel position will stay on for three seconds and go out (provided that the Bluetooth connection is successful).

Bluetooth pairing operation

When the bottom three section switch is turned to the B icon, press the left, middle and right buttons at the same time, and the blue light of the wheel position flashes to enter the pairing state. At this time, you need to open the Bluetooth device to search for M3 Mouse before pairing. After the connection is successful, the indicator light goes out.

2.4G pairing operation

When the bottom three section switch is turned to the G icon, press the left, middle and right buttons at the same time, and the green light of the scroll wheel position flashes to enter the pairing state. At this time, the receiver needs to be inserted. After the connection is successful, the indicator light will go out.

(Note: It is OK to pair with each other in the factory. If the 2.4G has no function, this step can be followed)

Lithium battery capacity

Capacity 500MAH

No light endurance: use every 120 hours (8 hours for office work)

About 83 hours of continuous use

Bluetooth ROI

Default 125HZ is not adjustable

SPI sampling time

Synchronous change with the rate of return: 8ms/2ms (default)/1ms

DPI/Return Indicator

On for three seconds and off

Photoelectric ic

PAW3395

DPI factory default settings

5-section DPI cycle regulation: 400 red, 800 blue (default), 1600 green, 3200 purple, 4800 orange

Wired/2.4G rate of return

The bottom button is adjustable: red light 125HZ, blue light 500HZ (default), green light 1000HZ

Drive

Windows systems only

Wireless transmission distance

Measured distance of office environment is about 10m


Working conditions

Temperature: - 10 ℃ - 50 ℃

Humidity: 10-90% RH

Instructions for adapter

In order to obtain the best wireless experience, it is recommended to insert the 2.4G receiver into the wire rod+the complimentary adapter, and place it 10CM close to the mouse for control, To reduce the delay rate and the interference signal.



Size: 129X66X39MM

Body weight: 58±5G

Life: 80,000,000times (times)

Acceleration: 50g

DPI: 400/800/1600/3200/4800

For more information, please contact our support team:
support@porodo.net

www.porodo.net



porodo



myporodo



Made in China