




Product Configuration

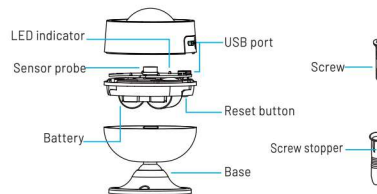

Specifications

Battery: CR123A 3V*2
 USB Power: 5V/1A
 Detection Range: 10M
 Detection Angle: 120°
 Detect Humidity: 0%—100%
 Wireless Frequency: 2.4GHz
 Wireless Standard: IEEE 802.11b/g/n
 Wi-Fi Range: 45m
 Battery Life: 2000 times per year
 Weight: 100g, Dimensions: 68.2 x 56 x 56mm

LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes 2times/second
AP mode	Indicator flashes 1time /2 seonds
Reset	Pressing button for 5-7s
Pairing mode	Indicator light continues to flash for 1 minute

NOTE:

1. Powered by USB,PIR sensor won't be in sleep mode
2. Device detects every 1 min,will alarm continuously when movement is detected
3. Support 2.4GHz Wi-Fi only ;
4. When the power supply is switched, there will be a delay in the APP display
5. Default temperature alarm range: 64 ℉ - 122 ℉ ;Default humidity alarm range: 40% - 80% RH

How to reset?

- (1) Press the reset button for 6 seconds till the indicator flash rapidly. Then device turns to smart wifi mode.
- (2) Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

Get Started with Tuya Smart App

1. Download APP

- Download the "Smart life" app from APP Store or Google Play to your mobile.




2. Register and Login

- Launch the "Smart life" app.
- To register,enter your mobile phone number or email address,create a password ,then login to the app.
- **Login if you have an account already.**

3. Add Device

- Power on the smart sensor which default's mode is Smart WiFi mode.
- Select the "+" symbol on the top right-hand corner.
- Select your product type and follow the instructions of the app.
- **If the connecting fails, try using AP Mode**
- On the "Add device" page select "AP Mode" on the top right-hand corner and follow the instructions of the app.

What's the App User Interface Like ?

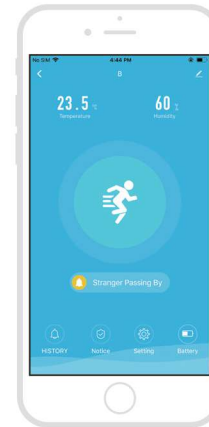

Smart life

Experience Advanced Features

You can experience the various advanced features of the product with the app, just try and do it yourself.

Main fuction

1. Tamper-proof

- When PIR housing is taken, app will push notification.

2. Temperature and humidity detection

- Powered by battery, short press button for 2 times . the indicator will be flashing .PIR is in paring mode, users can edit the alarm scale of temperature and humidity and temperature's remark.

3. Alarm record

- Device record
- APP recording:Check all the added devices alarm message in history .

Other fuction

Linkage alarm setting

- To connect two Sensors via scene setting.

Device sharing

- Allow others to control the device

Push notification

- Open/close push notification

Remove device

- Restore default settings; Delete and add the device again to clear the record by APP.

For more information on warranty, terms and support, log onto our website.

For more information, please contact our support team support@porodo.net

www.porodo.net

/porodo /myporodo

Made in China
 FC CE RoHS COMPLIANT