

PORODO



Porodo

Solvo

Universal AC Power Inverter

SKU: PDCI202BK



Table of Contents

Product Overview	2
Specifications	2
Schematic View	3
Safety Precautions	3
Operating Instructions	3
Incompatible Appliances	4
Disposal	4
Warranty	5
Contact Us	5

Product Overview


The Porodo Solvo Universal AC Power Inverter offers a convenient way to charge multiple devices at once. It has two AC outlets, one USB-A port, and two USB-C ports, including one with Quick Charge (QC) 18W and one with Power Delivery (PD) 45W. With a total output of 300W, it's suitable for various devices. The inverter also features a built-in fan cooling system and an LED digital display for easy monitoring. Its compact design makes it perfect for use on the go.

Specifications

Input Voltage	DC 12V
Output Voltage	AC 220V
Power Output	300W
Output Frequency	50Hz
USB-C1 Output	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.5A, 45W Max
USB-C2 Output	5V/3A, 9V/2A, 12V/1.5A, PD 30W Max
USB-A1 Output	5V/3A, 9V/2A, 12V/1.5A, QC 18W Max
Cooling System	Built-In Fan
Cable Length	70cm
Product Size	77.2 x 115 x 150.8mm
Model Number	PDCI202

Schematic View

1. Smokehole
2. Cooling Fan
3. Power Button
4. LED Display
5. 2 PD3.0 Ports
6. QC3.0 Port
7. AC Output
8. Cigarette Lighter Plug
9. Anti-slip Shrapnel

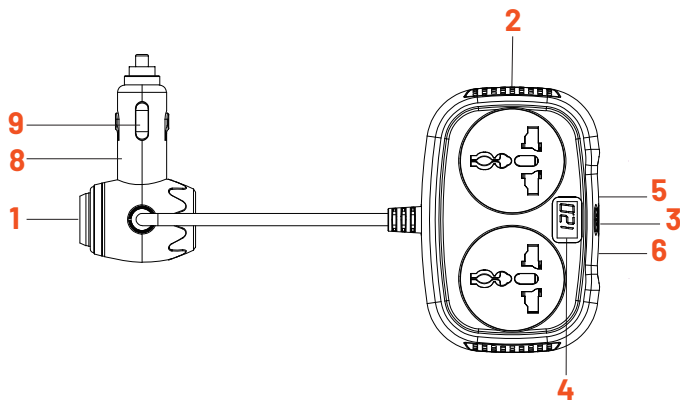

Safety Precautions

1. Ensure that the power of any appliance you connect to the device does not exceed 200W.
2. When using both the AC socket, cigarette lighter port, and USB ports at the same time, the total power should remain below 200W for the inverter to function properly.
3. This device operates with a modified sine wave. If you need to use appliances with a power consumption greater than 100W (such as an electric drill, water pump, or washing machine), it is recommended to use a pure sine wave inverter.

Operating Instructions

1. Start the car.
2. Insert the cigarette lighter into the cigarette lighter socket of the car.
3. Turn on the power switch. The blue indicator light will show that everything is functioning properly.

4. Ensure that the appliance you connect is under 200W.
5. Plug the appliance into the AC socket and connect any USB devices to the USB port.
6. Begin using the product. If the indicator light is off, this could indicate that the device has entered automatic protection mode due to conditions such as too high or low input voltage, a high-power appliance being used, a short-circuit, or excessive temperature.

Incompatible Appliances

1. Electrical appliances used for medical or public purposes.
2. Precision instruments and equipment (e.g., measuring tools).
3. Appliances that use phase control (e.g., blankets, carpets, dimmers, special instruments).
4. Lighting fixtures like fluorescent and energy-saving lamps (not exceeding 75W).
5. Appliances with inductive or capacitive loads that require more power to start than the rated power (e.g., fans, rice cookers, irons).
6. Rice cookers, induction cookers, hair dryers, electric drills, water pumps, LED lamps, and pneumatic drills.
7. Some electrical appliances may exceed the rated power, making them unsuitable for use with this product.

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **<https://www.porodo.net/warranty>** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:
<https://www.porodo.net/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

info@porodo.net

Website: **<https://www.porodo.net/>**

Service Support: **support@porodo.net**

Instagram: **porodo**