

PORODO



Porodo

**4G LTE WIFI6 Pocket Router
10000mAh Power Bank**

SKU: PD-PBFCH064


Table of Contents

Specifications	2
Schematic View	2
Interface Guide	3
Indicator Guide	3
Connection Guide	4
Wi-Fi Setup Instructions	4
Disposal	5
Warranty	5
Contact Us	5

Specifications

Wireless Technology	WCDMA, FDD-LTE, TDD-LTE
4G Frequency Bands	LTE: B41/40/38/20/8/7/5/3/1 WCDMA: B1/5/8
4G Download Speed	Up to 150Mbps (LTE CAT 4)
4G Upload Speed	Up to 50Mbps (LTE CAT 4)
WiFi Bands	2.4GHz
WiFi Standards	IEEE 802.11 b/g/n/ax
WiFi Max Speed	Up to 229Mbps
Encryption	WPA-PSK & WPA2-PSK
Battery Capacity	10000mAh
Re-Charge Time	4H
USB-C Input	5V/3A, 9V/2A, 18W
USB-C Output	5V/3A, 9V/2.2A, 10V/2.25A, 22.5W
USB-A Output	5V/3A, 9V/2.2A, 10V/2.25A, 12V/1.67A, 22.5W
Built-In Type-C Output	5V/3A, 9V/2.2A, 12V/1.67A, 20W
Lightning Output	5V/2A
SIM Card	Nano SIM
Antenna	2x 4G Antenna, 1x WiFi Antenna
Product Size	23.5×79.4×93.1mm
Weight	200g

Schematic View

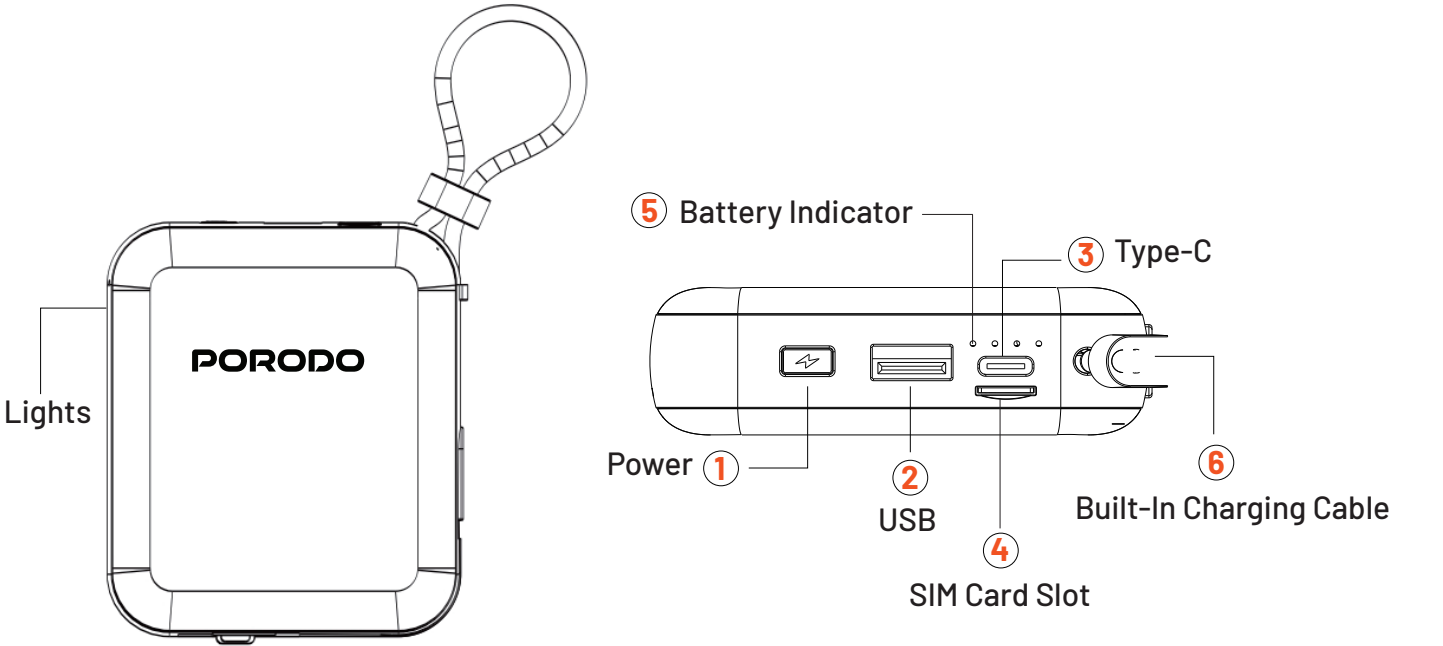

Interface Guide

Interface	Product Features Overview
Power Switch	Press and hold the power button for 3–5 seconds to turn the device on or off.
USB interface	The device supports multiple output levels: 5V/3A, 9V/2.2A, 10V/2.25A, and 12V/1.67A.
Type-C interface	Accepts inputs of 5V/3A and 9V/2A.
SIM card slot	Compatible with NANO SIM cards for network connectivity.
Battery indicator	Displays the remaining battery life.
Build-in charging cables	Includes integrated recharge cables for both Type-C and iPhone devices, supporting fast recharging capabilities.

Indicator Guide


Light Color	Status	Description
Red	Solid Light	Unable to detect or install a SIM card.
	Flashing	The device is turning on.
Green	Solid Light	The internet connection is functioning normally.
	Flashing	The device is recognizing the SIM card and establishing an internet connection.
Blue	Solid Light	Devices are connected to the Wi-Fi hotspot.
White	Solid Light	The device is undergoing a FOTA upgrade.

Connection Guide


- Step 1:** Insert an available NANO SIM card into the designated slot.
- Step 2:** Press and hold the power button for 3-5 seconds until the red light flashes, indicating the device is turning on. Continue to hold until the green light remains steady, showing that the device is fully operational.
- Step 3:** On your phone, tablet, laptop, or other devices, search for the Wi-Fi SSID. The default SSID is "PD-XXXXXX" (where 'xxxxxx' represents the final six digits of the MAC address). The default password is "12345678", allowing you to connect to the hotspot.
- Step 4:** Enjoy your high-speed internet connection.

Wi-Fi Setup Instructions


1. Once your device is successfully connected to Wi-Fi, enter 192.168.0.1 into your browser's address bar to reach the login page.

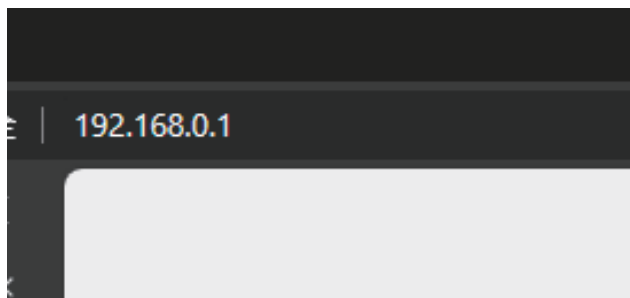

2. Enter the default username and password (username: admin, password: admin) and click "Sign In."

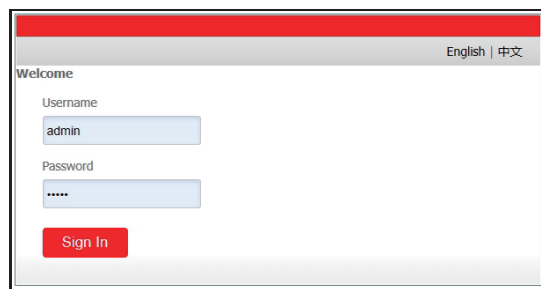

3. After signing in, you will have the option to change your Wi-Fi SSID and passwords for the device.

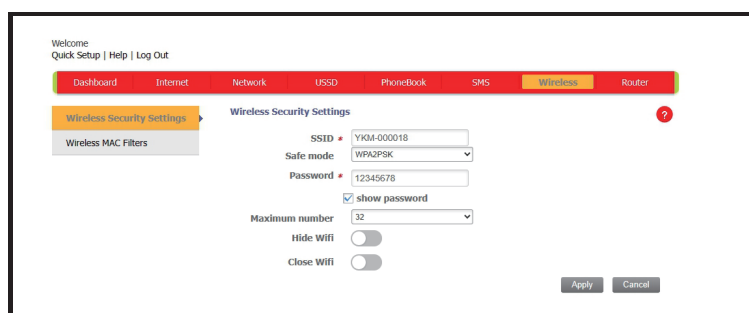

Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.

Warranty

Products that you buy directly from our **Porodo** website or shop come with a 24-month warranty.

When you buy **Porodo** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **porodo.net/warranty** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:
porodo.net/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at:
info@porodo.net

Website: **porodo.net**

Service Support: **support@porodo.net**

Instagram: **porodo**