

porodo



User Manual

PD-PBFCH005-BK

Thanks for choosing our product, Please read the manual carefully before using

Technical Specifications

Outdoor Battery Pack

Battery: LiFePO4
Capacity: 3.2V / 48000mAh / 153.6Wh
USB-C Input: 5V/3A 9V/3A 15V/3A 20V/2.25A 45W
USB-C Output: 5V/3A 9V/3A 12V/3A 15V/3A 20.3V/3A 60W
USB-A Output 1: 5V/2.4A
USB-A Output 2: QC 3.6-6.5V/3A 6.5-9V/2A 9-12V/1.5A 18W
Auxiliary Outlet: DC 12V/15A 180W
Dimensions: 20.8 x 14.8 x 3.8 cm
Weight: 1500g

Package Contents

Power Pack x1	Changeover Plug x1 (Option)
Charger x1	Handy Bag x1 (Option)
Manual x1	

Production Introduction

This Model consist of USB-C & Dual USB & DC & Cigar Lighter socket & button


Charging LED Power Indicator Lights

First light blinking: 0%-5%
First light one, Second light blinking: 5%-25%
Two lights on, Third light blinking: 25%-50%
Three lights on, Fourth light blinking: 50%-75%
Four lights on: Fully charged: 75%-100%

Power Bank Recharge

Supports two charging ways:
1. DC input charging port: The charging time is about 6-7 hours using 15-20V/2A Charger
2. Type-C input charging port: The charging time is about 5 hours using 45W PD charger

Identification of Parts

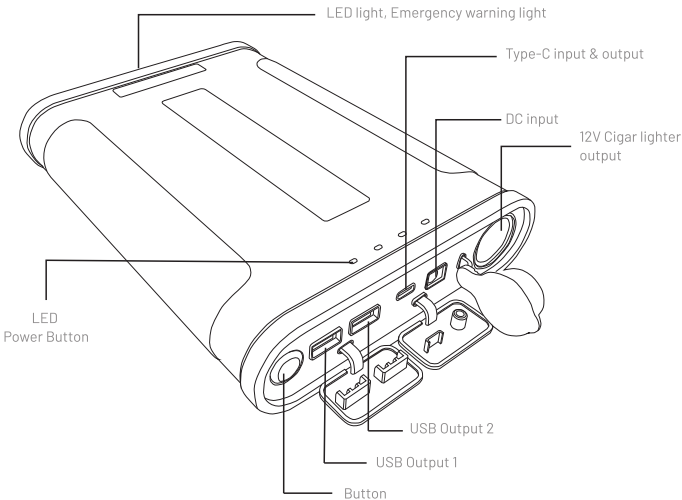

Charge your mobile device

- 1.Support PD devices: Mobile phone / Tablet PC and other 5V devices
2. Plug a cable into the USB port or Type-C port
3. Attach the remaining end of the cable to you devices
4. To turn off the power button
5. Tou devices is now charging

Using this power bank to charge 12V Devices

- 1.Support 12V devices: Car refrigerator / Infator pump / UAC battery / Outdoor tent light / Camp light
Fishing electric reels and other under 150W devices.
- 2.Plug you devices into the 12V cigar lighter socket
- 3.The socket will automatically power the connected device
- 4.To turn off the device, uplug it from the power pack

Button Function

Double click to turn on / Off the warning light, Long press 3s to turn on / off the lighting function

Usage Notes

- 1.To protect the long-term capacity of your Power Pack Please unplug the power cable after full charged.
- 2.Keep the product away from extreme heat or cold places, as well as any flammable, or explosive storage places or damp places.
- 3.Run a full charge / discharge cycle at lease once every four months to avoid shortening the life span of the internal battery.
- 4.If long term storage is likely to occur between uses, we recommended to store at approximately 50% of full charge.
- 5.Although the 12V socket is capable of pass through charging, avoid charging and discharging the Power pack at the same time as this may reduce the battery's life span.
- 6.Please note the cigar lighter output voltage range is 11V-19.5V7
- 7.When supply powerfor different devices.Afurther 10% ~20% is lost by the device being charged and the charging cable used.Always use the original cable supplied with the device being charger...optimum results.
- 8.Using your Power pack in temperatures below 0C or above 60C %highly inadvisable end will likely cause irreparable damage bathe internal battery.

FAQ

- 1.Can I charge four devices at the same time?
We do not recommend Met PD60W output be used simultaneously with cigarette outlets.
- 2.What should we do if the power bank can't recharge?
Please check the charging adapter Is connected correctly and the 100V.240V AC charging is enabled, if the problem still exists, please contact the supplier for more professional advices.
- 3.What should we do if the power supply cannot charge other devices?
Please Check Me charging line is inserted in the correct port. Or check whether the output of this power supply is compatible with the voltage of electronic devices, Refer to your device's manual, product label, or adapter to find the problems.

Designed and manufactured by Tegtronix Inc.
All rights reserved 2021.

For more information on warranty, terms and support log onto our website.
We promise hassle-free and quick after-sales support.

www.porodo.net

[@porodo](#) [/porodo.gcc](#)

FC CE RoHS COMPLIANT MADE IN CHINA