



User Manual

PC HEALTH MONITOR

9PIN PLUG & PLAY - MACRO SOFTWARE

PDX536

WATER COOLING SCREEN INSTRUCTION

1 HOME


- Topic selection: click the drop-down box to switch between different topics
- Screen Flip: When screen rotation is selected, if the software prompts whether to convert the video, click Yes. If the prompt space is insufficient, please delete some videos from the secondary screen in "Device Management"
- Brightness adjustment: slide to adjust brightness
- Setting the background: one click to set the background video or picture of the theme



2 Device


Click the device management button to enter the device management window

- Refresh the storage information to see the currently available storage space
- Select the path: click the path, and there are 4 paths for selection
- Refresh: Re refresh the files in the currently selected path
- Play Selected: Play the selected content. If you select the play video mode, the video will be used as the boot animation for the next boot

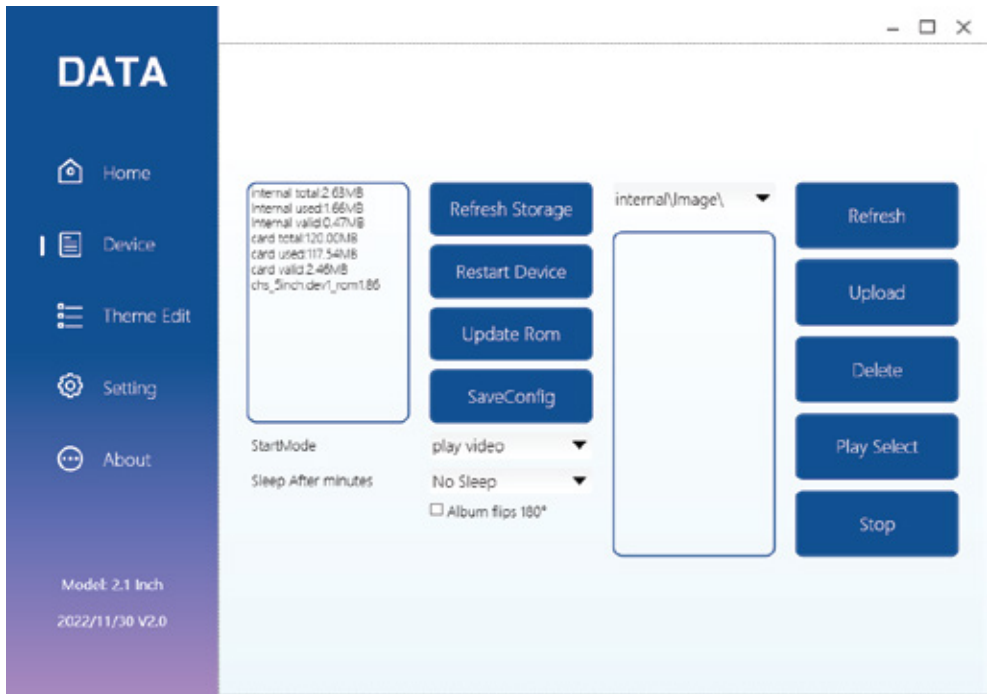

How to upload and play videos

1. Select the path and select the path "SD card video" 2.
- Click the upload button and select the video to upload in the pop-up file selection box. Wait for the upload to complete. 3.
- Select the file just uploaded from the list and click Play



path choice

How to set the boot cycle to play video

1. Select the "Play Video" mode in the secondary screen startup mode.
2. In the file list, select the video you want to start playing and click Play to set it as the default video playback.
3. Click the Save Settings button. Click the button to restart the secondary screen again to test the effect



Boot Play Mode

How to set the boot carousel album

1. Select the storage path and upload the picture
2. Select the "carousel" mode in the secondary screen startup mode
3. Click the Save Settings button. Click the button to restart the secondary screen again to test the effect

Upload file description

Usage mode	Playback standard
Video	800x480 24 frames with a bit rate of H264 below 3M
Album carousel mode	JPG, JPEG, BMP, PNG format

3 Topic Editing

Create and edit the theme

4 Settings

- Start up: check the Start up box
- Set monitoring network card: select the network card to be monitored
- Weather forecast settings: enter your city, click Search, and then select the corresponding city from the list to save
- CPU temperature sensor: different sensors can be switched

5 Troubleshooting

1. If it is stuck in the initialization interface, please try the following:

Open the code.ini file in the directory, change 64 to 0 or 8192, save it, and restart the software

2. Prompt for missing .net components: please go to Microsoft's official website to download

<https://dotnet.microsoft.com/en-us/download/dotnet-framework/net472>

3. The device is not connected

a. Check the connection of data lines to ensure adequate power supply

b. In service management, check whether the Windows Management Instrumentation service runs normally. If not, run it. Restart the service if available

c. Turn off other RGB lamp control software

d. The restart or startup software cannot be connected, but it can be connected after re plugging

This is usually caused by the power supply of the motherboard. Try to enter the BIOS and find the ERP option in the power management option. If it is closed, open it; If open, close

4. Use problems

a. CPU temperature is inconsistent with other software

There are many temperature sensors inside the CPU, such as packaged sensors and diode sensors. Different software takes different sensors, so it is normal that the display is different. You can switch between different temperature sensors in the "Settings" of the software

b. Video card, network speed not displayed

Switch the video card or network card you want to monitor in "Settings"

c. The screen is still on after power off

In "Settings", adjust the device sleep time to 2 minutes, and then save

d. In "Settings", click the Upgrade ROM button, and restart the secondary screen after the upgrade is successful

**For more information,
please contact our support team:**

support@porodo.net