




PS5 Slim stand with Magnetic Charger
SKU:PDX118



Before installing and using the product, please carefully read this User Manual to guarantee correct usage.

Compatible Platforms

This product is compatible with the new PS5 Digital and Disc Edition Consoles, PS5 Dualsense Controllers, and PS5 Dualsense Edge Controllers.

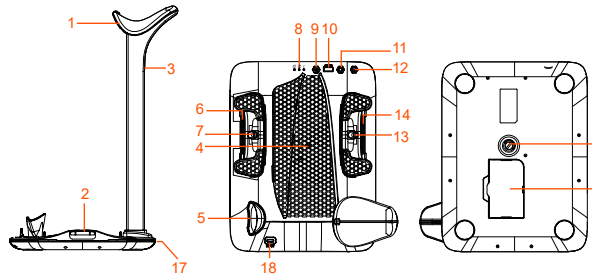

Product Diagram Labels

- | | |
|--|---|
| 1. Headphone Storage Rack | 11. Lighting Control Button |
| 2. Fan Exhaust Port | 12. Master Power Button |
| 3. Headphone Storage Rack Lighting | 13. Magnetic Type-C Connector Contact Slot + Magnetic Type-C Male Connector |
| 4. Console Exhaust Vent | 14. Gamepad Charging Status Light |
| 5. Remote Storage Base + Lighting | 15. Removable Disc Tray Box |
| 6. Gamepad Charging Status Light | 16. Hand-Tightened Console Screw |
| 7. Magnetic Type-C Connector Contact Slot + Magnetic Type-C Male Connector | 17. Lighting Assembly |
| 8. Fan Speed Indicator Light | 18. Type-C Power and Data Input |
| 9. Fan Control Button | |
| 10. USB 2.0 Type-A Output Port | |

Electrical Parameters and Functions

Type-C Port Input: DC 5V/3A (MAX)
USB-A Port Output: DC 5V/1.5A (MAX)
Cooling Fan Working Voltage/Current: 0.1A (MAX)
Cooling Fan Speed: 5000 RPM (MAX)
PS5 Game Controller Charging Current: 0.5A * 2
PS5 Game Controller Charging Voltage: DC 5V
Magnetic Type-C Connector Contact Slot Output Voltage: DC 5V * 2
Magnetic Type-C Connector Contact Slot Output Current: Up to 1A(MAX)*2
Single Full Charge Time for PS5 DualSense Controller: 4 hours
Single Full Charge Time for PS5 DualSense Edge Controller: 3 hours
Length of Dual-Head USB A Male to Type-C Data Cable: 240mm
Number of Disc Slots on Disc Rack: 5
Power Supply Method: USB A Port on the back of the PS5 console


Protection Features

Charging Protection: The device features overcurrent, overvoltage, and short circuit protection. If these situations occur, all indicator lights (ambient lights, controller indicators, fan indicators) will flash red. This issue can be resolved by turning the device off and then back on using the master power button. If overcurrent, overvoltage, or short circuit issues persist, the red lights will continue to flash.


Operational Defaults

*Upon powering on, the device defaults to high-speed fan operation.
*The lighting system, when powered on, will resume from the last color setting before the previous shutdown or power-off, thanks to its memory function.

Controller Charging Status Light

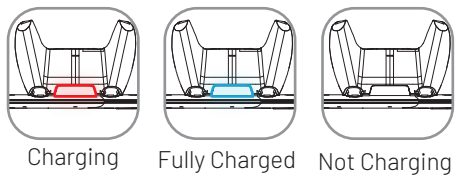

Fan Indicator Light

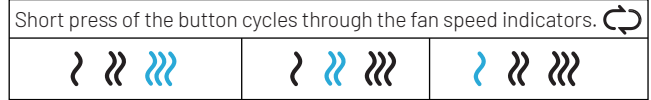

Fan Operation

-Long press for 3 seconds to turn the fan off, indicated by no light.
-Long press for 3 seconds again to turn the fan on, with the corresponding gear's blue light activated.

Ambient Lighting

Short press of the button to cycle through the colors:
Red → Blue → Green → Yellow → Pink → White → Breathing Rainbow Light.
-Long press for 3 seconds to turn the ambient light off.
-Long press for 3 seconds again to turn the ambient light on.

Master Power Switch

-Short press of the button to turn off all power.
-Short press again to turn on all power.

Usage Notes

*Ensure proper ventilation and do not cover the fan exhaust port or the console exhaust vent with clothing, plastic bags, or other items.
*When the PS5 console is not in use, turn off the fan cooling switch to extend its lifespan.
*Do not use the product in humid or high-temperature environments.
*Do not modify or disassemble the product.
*If there is dirt or debris on the charging pins of the base, ensure they are cleaned for proper contact. After extended use, clean them with a cloth to ensure proper charging function.

Diagram of Assembly

