

soudtec
BY PORODO



TRUE-WIRELESS BUDS

SUPER BASS WITH ANC MODE

PD-STWLEP015 OPERATION MANUAL

User Manual

- **Brief Introduction**


Item: True Wireless Earphone PD-STWLEP015


Model No.: PD-STWLEP015

It is a true wireless blue-tooth earphone, each ear piece comes with a microphone that can be used individually or used together for stereo sound. The earphone supports music and calling functions.

- **Charge your True Wireless Earphone PD-STWLEP015**

Prior to use, charge your Wireless Earphones. Use the supplied Micro USB charging cable. Plug the cable into the TYPE C port which is located on the back of the charging case.

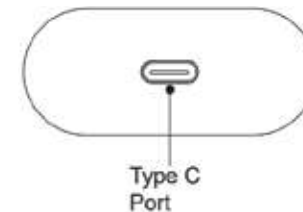

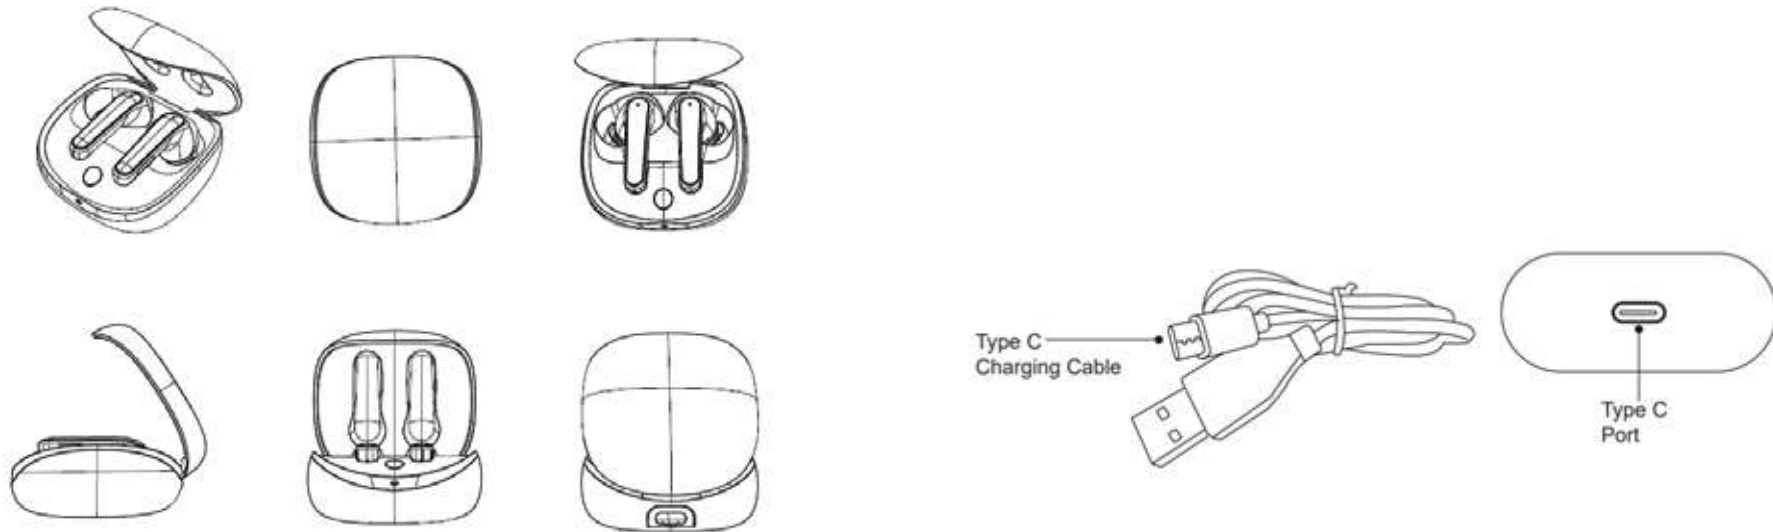

● Connecting/Bluetooth Pairing

1. Make sure the True Wireless Earphones are within 10 meters of the device you will be connecting to.
2. Remove both earphones from the charging case and place into your ears.
3. Turn on your device's Bluetooth. Most devices will automatically detect your earphones. Locate and select "**Por-EP015**". It will indicate that your earphones are now connected.

If your device does not automatically detect your earphones, make sure Bluetooth is turned on, do a **SEARCH** for "**Por-EP015**" and then click **CONNECT**.

TWS (Por-EP015) Operation Instructions

No.	Item	Left earphone	Right earphone	Tone (Left)	Tone (Right)	LED Indication	Remark
1	Pairing Name	Por-EP015		/		/	
2	Power On	Open the earphone cover , automatically power on		Power on		The white light of the case is on for 1 second	
3	Power Off	Put it in the charging box, automatically power off		Power off		When any earphone is putted into the box, the white light of the case flashes once	
		Without connection , 10 minutes shutdown		Power off		White light of the case blinks three times quickly and then turns off	
4	TWS Pairing	No matter which earphone turns on first, two earphones automatically formed		/		TWS pairing status: White lights of the earphones keep flashing (0.2S)	
5	Connected with Phone	When the earphone is powered on, it enters the pairing + callback mode and shuts down without connection for 10 minutes		Connected		Pairing: White lights keep flashing (0.5S) Connected: Lights turn off	
6	Volume Control	No such function		/		/	

7	Pause/Play	Click once		/	/	
8	Media Selection	Double click on the left side--Previous Song	Double click on the right side--Next Song	/	/	
9	Mode Switch	Hold for 2 seconds to switch modes Prerequisites: The noise reduction mode is automatically switched when both earphones are formed, and the common mode is automatically switched when just single earphone is on		Normal mode - Transparent mode - Noise reduction mode (loop play)	/	
10	Call In	NA		The earphone ring tone is synchronized with the mobile phone ring tone		
11	Answer Calls	Double click when calling in		"DU"	/	
12	Ring Off	Double click during the call		"DU"	/	
13	Call Rejection	Press and hold for 2 seconds when calling in		"DU"	/	
14	SIRI ON	Triple-click		"DU"	/	

15	SIRI OFF	Operation: Click Prerequisites: SIRI is enabled. Click to exit SIRI, not pause playback	/	/	
16	Factory Data Reset	Put the earphones into the charging case. In the charging state, long press the button of the charging case for 3 seconds to force the progress pairing state of the earphones. Continue to long press for 10 seconds to restore the factory Settings PS: Full clear (both TWS pairing information and phone pairing information are cleared)	/	If the light of the charging case blinks three times slowly, the factory Settings are restored, the white lights of two earphones blink quickly for 0.2 seconds at the same time. The earphones will be successfully formed, and the white lights on both earphones blink quickly for 0.5 seconds	
17	Loss of connection with mobile phone over distance/Bluetooth off/Active disconnection	The Earphone enters the connection back + pairing mode and shuts down without connection for 10 minutes	Disconnect-- Pairing	Pairing: Two white lights keep flashing (0.5S)	
18	Low Battery Alarm	10% low power reminder, remind once every 3 minutes, about 3-4 times, low power reminder to shutdown time is about 10 minutes	Low Battery	Low Battery: The earphones white lights blink once every two seconds	Battery lower side power off earlier
19	Earphone Charging	The charging case charges the earphones		Charging: The earphone lights are off Fully charged: The earphone lights are off	
20	Earphone Case Charging	Plug it in--Start charging--Fully charged		Charging: Breathing White Fully charged: White light goes out	White light of the Charging Case

Specification and Features sheet

No.	Pairing Name	Por-EP015		
1	Single-earphone battery voltage	3.7	V	Single Earphone
2	Single-earphone battery capacity	55	mAh	
3	Wattage of a single-earphone battery	0.111	Wh	
4	Charging case battery voltage	3.7	V	Charging Case
5	Charging case battery capacity	500	mAh	
6	Wattage of charging case battery	1.850	Wh	
7	Charging voltage of charging case	5	V	